


Fuseholder Open Design, 14.3 x 51 mm, Screw Clamp, red



380 VAC/DC · 5 W/50 A



NNO

Description

- This product is phased-out without alternate Type. Availability upon request.
- With lock and safety calibration
- Screw or rivet fastening


Weblinks

[pdf](#), [html](#), [General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

Technical Data

Fuse-Link	14.3 x 51 mm
Mounting	Screw
Mounting	Screw or Rivet
Terminal	Screw clamps
Rated Voltage	380VAC/DC
Rated Current	50 A
Rated Power Acceptance IEC	5 W / 50 A @ Ta 23°C
Degree of Protection	IP 00
Protection Class	Suitable for appliances with protection class 1 or 2 acc. to IEC 61140
Admissible Ambient Air Temp.	-5°C to 70°C
Climatic Category	5/070/21 acc. to IEC 60068-1
Material: Socket	Thermoset, red
Unit Weight (Socket/Cap)	102 g
Storage Conditions	0°C to 60°C, max. 70% r.h.
Product Marking	Voltage, Current

Soldering Methods	Wave
Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11
Dump Heat	acc. to NF C 20-604
Climatic Composite	acc. to NF C 20-610 Phase 1-2-3-5

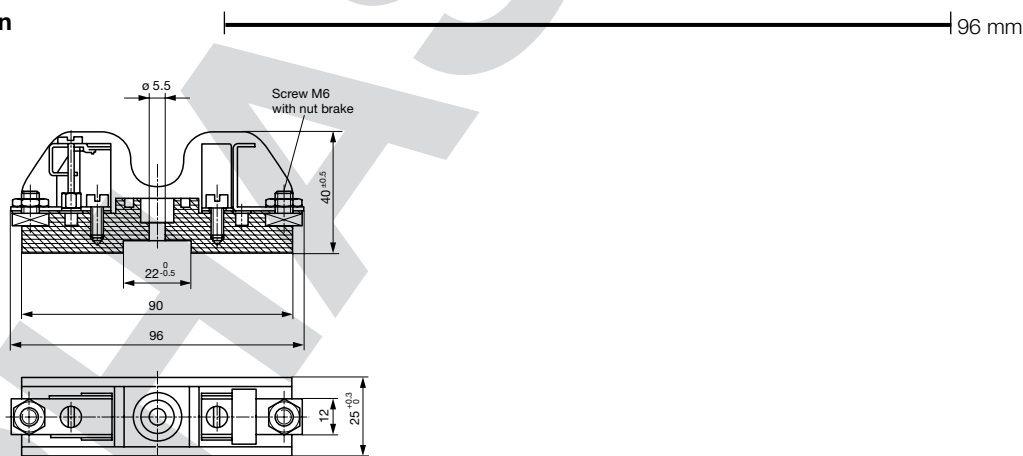Abmessungen**Variants**

Holder	Colour Holder	Order Number
●	red	7085.4910

Packaging Unit Bulk (100 pcs.)