, solder terminal, Plug, 5.5 mm, 2-pole, DC Plug/Socket



See below:		
Approvals	and	Compliances

Stock-Check, Detailed request for product

Weblinks

Description

Technical Data

Insulation Resistance

- Solder :

Diameter Number of Poles

Ratings DC Dielectric Strength

- for cable mounting
- Low Voltage DC Plug and Socket

5.5 mm / 2.5 mm

 $> 100 M\Omega$ @ 500 VDC

2-pole 1.0A / 12VDC

500 VDC

- DC Plug: 2-pole , straight

Allowable Operation Tempe-	-20 °C to 70 °C	
rature		
Terminal	solder terminal nickel-plated	
	lockable	
Style	straight	
Lifetime	5000 Insertions	

pdf data sheet, html datasheet, General Product Information, Distributor-


Approvals and Compliances


Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Compliances

The product complies with following Guide Lines

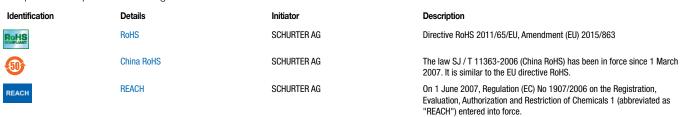

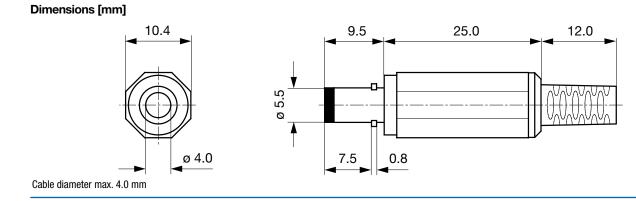

4840.1211

Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
DC Plug/Socket	5.5	2-pole	solder terminal	4840.1211

Availability for all products can be searched real-time: https://www.schurter.com/en/info-center/support-tools/stock-check-distributors

Packaging unit

100 Pcs

Mating Outlets/Connectors

Category / Description



DC Plugs / Sockets Overview complete

, PCB terminals, Socket, 5.7 mm, 2-pole, DC Plug/Socket

4840.2212