Touch-Safe Fuseholder, 35 mm DIN-Rail, 10.3 x 38 mm, 1000 VDC



1000 VDC · 4 W · 600 VAC/DC · 30 A (UL/CSA)

Description

- Mountable on 35 mm DIN-Rail
- Easy installation and removal of fuses
- For Fuses up to 100 kA Interrupting Rating

See below: Approvals and Compliances

Applications

- Combiner Boxes in Photovoltaic Systems

Weblinks

pdf data sheet, html datasheet, General Product Information, Distributor-Stock-Check, Detailed request for product, Microsite, Landing Page

FSO

Technical Data

Fuse-Link	10.3 x 38 mm	
Mounting	DIN-Rail Mounting	
Terminal	Press plate 2 - 10 mm ² / AWG #8 - 14 (stranded), 2 - 6 mm ² , AWG #10 - 14 (solid), 2 Nm / 17.7 lb-in (max. torque)	
Rated Voltage	1000 VDC (Self certified), 600 VAC/ DC (UL/CSA)	
Rated current	30A (UL/CSA)	
Rated Power Acceptance IEC	4 W	
	max. 4 W (self certified)	
Degree of Protection	IP20	
Admissible Ambient Temp.	-40 °C to 130 °C	
Material: Socket	Thermoplastic, UL 94V-0	
Unit Weight	54 g	
Storage Conditions	0 °C to 60 °C, max. 70% r.h.	
Product Marking	Type, Tech. Information	

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals


SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: FSO

Approval Logo	Certificates	Certification Body	Description
A1	UL Approvals	UL	UR File Number: E39328
\$ £	CSA Approvals	CSA	CSA Certification Record: 248899

Product standa	ards		
Product standards	s that are referenced		
Organization	Design	Standard	Description
IEC.	Designed according to	IEC 60127-6	Miniature fuses. Part 6. Fuse-holders for miniature fuse-links
(h)	Designed according to	UL 4248-1	Industrial Control Equipment
CSA Group	Designed according to	CSA C22.2 no. 4248.1	Industrial Control Equipment
Application sta	ndards		
Application standa	ards where the product can be used		
Organization	Design	Standard	Description
IEC	Suitable for applications acc.	IEC/UL 62368-1	Audio/video, information and communication technology equipment - Part 1: Safety requirements
Compliances	blies with following Guide Lines		
Identification	Details	Initiator	Description
CE	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
UK CA	UKCA declaration of conformity	SCHURTER AG	The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.
ROHS	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
©	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.
Dimension [mn	n] —		

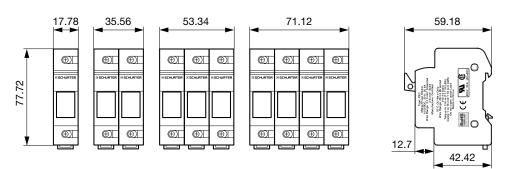

Do not open under load

Variants

Holder	Remark	Order Number
•	4-pole	0091.0004
•	1-pole	0091.0001
•	2-pole	0091.0002
•	3-pole	0091.0003

Availability for all products can be searched real-time: https://www. schurter.com/en/info-center/support-tools/stock-check-distributors



The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.