#### Fuseholder Open Design, 5 x 20 mm, Solder, Cover





Screw/- Rivet mounting from front side Solder Open fuseholder 5 x 20 mm bar Solder

# 600 VAC/DC · 3.2W / 10A @ Tu 23°C · 10A (UL/CSA)

#### Description

- Optional covers, see accessories
- 10 piece strip manually separable

### **Technical Data**

lecilical Data			
Fuse-Link	5 x 20 mm		
Attachment	Screw/Rivet		
Terminal	Solder		
Rated Voltage	600 VAC/DC		
Rated current	10A (UL/CSA)		
Rated Power Acceptance IEC	3.2W / 10A @ Tu 23°C		
Admissible Ambient Temp.	-40 °C to 85 °C		
Climatic Category	40/085/21 acc. to IEC 60068-1		
Material: Socket	Thermoplastic, black, UL 94V-0		
Material: Cover	Thermoplastic transparent UL 94V-0		
Material: Terminals	Copper alloy, tin-plated		
Unit Weight	3.62 g		
Storage Conditions	0 °C to 60 °C, max. 70% r.h.		
Product Marking	S, Rated Voltage, Rated current, Certi-		
	fication marks		

#### See below: Approvals and Compliances

#### Weblinks

pdf data sheet, html datasheet, General Product Information, Distributor-Stock-Check, Accessories, Detailed request for product, Microsite

Soldering Methods	Iron Soldering Profile
Solderability	350 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 2
Resistance to Soldering Heat	350 °C / 10 sec acc. to IEC 60068-2-20, Test Tb, method 2
Contact Resistance	≤ 10 mΩ at 100 mA acc. to IEC 60127-6
Dielectric Strength	> 3kV between live parts (50Hz: 1 min)
Impulse Withstand Voltage	> 4 kV between live parts
Insulation Resistance	> 10 MΩ between live parts (500 VDC: 1 min)

### **Approvals and Compliances**

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

### Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: UH

Approval Logo	Certificates	Certification Body	Description		
c <b>FN</b> <sup>°</sup> us	UL Approvals	UL	UR File Number: E39328		
Product standards					
Product standards that are referenced					
Organization	Design	Standard	Description		
(UL)	Designed according to	UL 4248-1	Industrial Control Equipment		
CSA Group	Designed according to	CSA C22.2 no. 4248.1	Industrial Control Equipment		


## **Application standards**

Application standards where the product can be used


Organization	Design	Standard	Description	
IEC	Suitable for applications acc.	IEC/UL 62368-1	Audio/video, information and communication technology equipment - Part 1: Safety requirements	
Compliances				
The product complies with following Guide Lines				
Identification	Details	Initiator	Description	

CE		SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
UK CA	UKCA declaration of conformity	SCHURTER AG	The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.
ROHS	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
<b>©</b>	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as

# **Dimension** [mm]



"REACH") entered into force.





Variant 0031.5001

Variant 0031.5010


47 mm

# **Derating Curves**



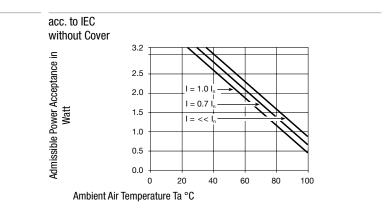

### Variants



Availability for all products can be searched real-time: https://www.schurter.com/en/info-center/support-tools/ stock-check-distributors

## **Packaging Unit**

Bulk (100 pcs.)

### Accessories

Description



Cover\_OG\_\_UHB\_\_UH Cover for Holder OG (Clip) 5x20, OG (Halter) 5x20, UH, UHB