

Magnetically Compensated SMD Choke, compact



See below:

#### Approvals and Compliances

#### Description

- Current compensated choke
- SMD-terminals
- Vertical and horizontal version

#### Applications

- Attenuation of common mode interferences
- Designed for 230/400 VAC applications
- Chopper amplifiers
- DC drives and stepper motor controls
- Switching power supplies

#### Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Approvals](#), [Distributor-Stock-Check](#), [Detailed request for product](#), [SPICE Library](#)

#### Technical Data

|                           |                            |
|---------------------------|----------------------------|
| Rated voltage             | up to 250 VAC              |
| Rated Current             | 0.4 - 4 A @ Ta 40 °C       |
| Rated inductance          | 0.5 - 39mH, Tol. -30% +50% |
| Power Operating Frequency | 50 / 60Hz                  |
| Terminal Type             | SMD                        |
| Weight                    | 2 - 6g                     |
| Material                  | UL 94V-0                   |
| Sealing Compound          | UL 94V-0                   |

|                           |                                        |
|---------------------------|----------------------------------------|
| Test Voltage              | 1.5kV, 50Hz, 1 min, winding to winding |
| Isolation Voltage         | 2kV eff., winding to ambient           |
| Climatic Category         | 25/100/21 acc. to IEC 60068-1          |
| Allowable Operation Temp. | -25 °C to 100 °C                       |

#### Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

#### Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: DKFS

| Approval Logo                                                                       | Certificates                 | Certification Body | Description            |
|-------------------------------------------------------------------------------------|------------------------------|--------------------|------------------------|
|  | <a href="#">UL Approvals</a> | UL                 | UR File Number: E72928 |

#### Application standards

Application standards where the product can be used

| Organization                                                                        | Design                         | Standard       | Description                                                                                   |
|-------------------------------------------------------------------------------------|--------------------------------|----------------|-----------------------------------------------------------------------------------------------|
|  | Suitable for applications acc. | IEC/UL 62368-1 | Audio/video, information and communication technology equipment - Part 1: Safety requirements |


Compliances

The product complies with following Guide Lines

| Identification                                                                   | Details                                        | Initiator   | Description                                                                                                                                                                                           |
|----------------------------------------------------------------------------------|------------------------------------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <a href="#">CE declaration of conformity</a>   | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
|  | <a href="#">UKCA declaration of conformity</a> | SCHURTER AG | The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.                                                  |
|  | <a href="#">RoHS</a>                           | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863                                                                                                                                                    |
|  | <a href="#">China RoHS</a>                     | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.                                                                                  |
|  | <a href="#">REACH</a>                          | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.                               |


Dimension [mm]

Case 48-2S (SMD-Version)

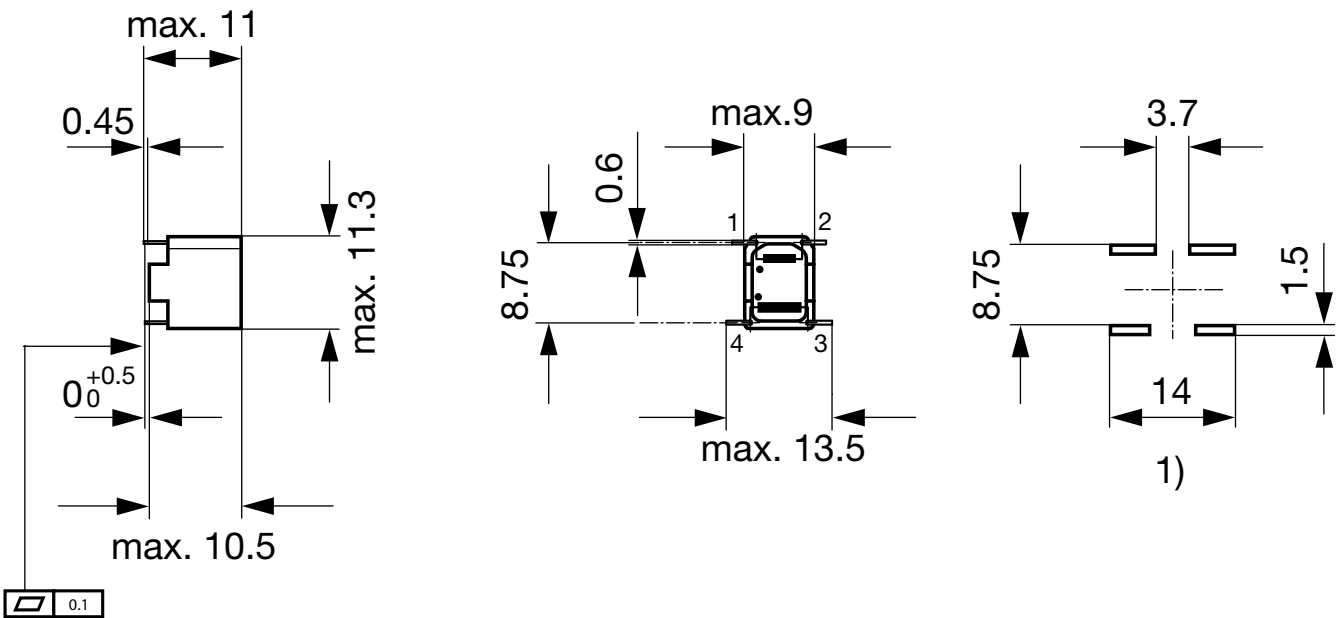

1) Possible solder land pattern


Case 2B

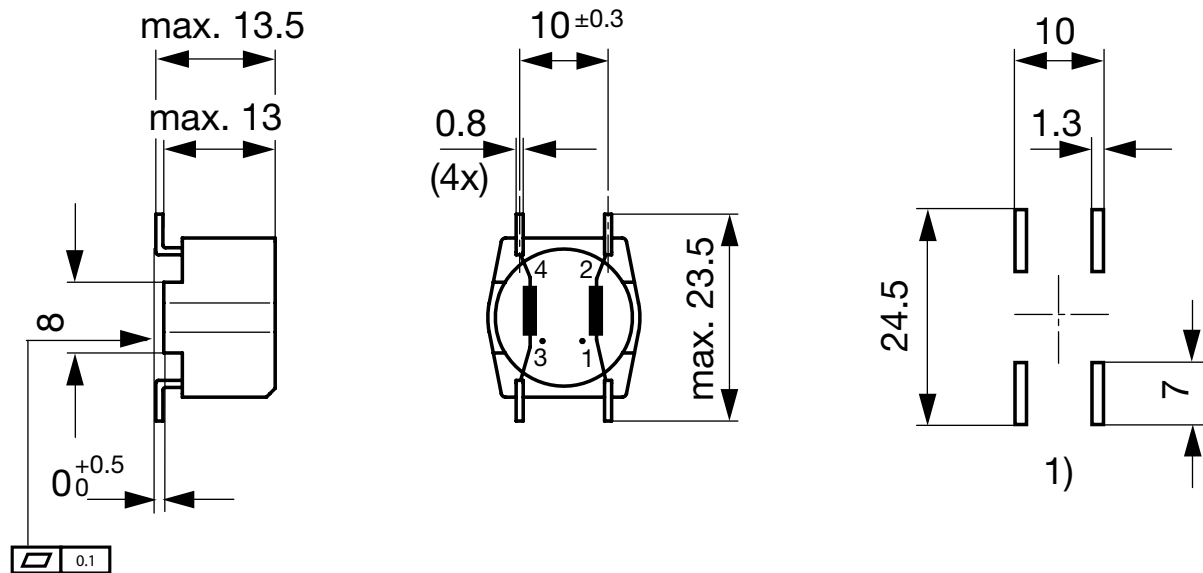


1) Possible solder land pattern

## Impedance curves

DKFS-6248-xxxx



DKFS-B22B-xxxx



## Variants

| $I_n$ [A] | $L_n$ [mH] | $R_{cu}$ [mΩ] | Power Dissipation [W] | $f_{RES}$ [MHz] | Weight [g] | Housing | Packing unit [pcs.] | Order Number   |
|-----------|------------|---------------|-----------------------|-----------------|------------|---------|---------------------|----------------|
| 0.4       | 39         | 1286          | 0.2                   | 0.15            | 6 g        | 2B      | 100                 | DKFS-B22B-D439 |
| 0.5       | 27         | 841           | 0.21                  | 0.2             | 6 g        | 2B      | 100                 | DKFS-B22B-D527 |
| 0.5       | 4          | 500           | 0.25                  | 1.2             | 2 g        | 48-2S   | 176                 | DKFS-6248-D504 |
| 0.6       | 15         | 453           | 0.16                  | 0.35            | 6 g        | 2B      | 100                 | DKFS-B22B-D615 |
| 0.8       | 10         | 336           | 0.22                  | 0.45            | 6 g        | 2B      | 45                  | DKFS-B22B-D810 |
| 0.9       | 2          | 240           | 0.39                  | 1.6             | 2 g        | 48-2S   | 176                 | DKFS-6248-0102 |
| 1         | 8.2        | 269           | 0.27                  | 0.55            | 6 g        | 2B      | 45                  | DKFS-B22B-0J2Q |
| 1.2       | 6.8        | 219           | 0.32                  | 0.6             | 6 g        | 2B      | 45                  | DKFS-B22B-1K6Q |
| 1.5       | 3.3        | 122           | 0.28                  | 1.8             | 6 g        | 2B      | 45                  | DKFS-B22B-1N3L |
| 2         | 0.5        | 50            | 0.4                   | 4.5             | 2 g        | 48-2S   | 176                 | DKFS-6248-02D5 |
| 2         | 1.8        | 57            | 0.23                  | 3               | 6 g        | 2B      | 45                  | DKFS-B22B-021Q |
| 2.5       | 1.5        | 41            | 0.26                  | 4.5             | 6 g        | 2B      | 45                  | DKFS-B22B-5K5J |
| 3         | 1.2        | 30            | 0.27                  | 5               | 6 g        | 2B      | 45                  | DKFS-B22B-0L2J |
| 4         | 0.7        | 18            | 0.29                  | 6.5             | 6 g        | 2B      | 45                  | DKFS-B22B-04D7 |

Availability for all products can be searched real-time: <https://www.schurter.com/en/info-center/support-tools/stock-check-distributors>

| I <sub>n</sub> [A] | L <sub>n</sub> [mH] | R <sub>cu</sub> [mΩ] | Power Dissipation [W] | f <sub>RES</sub> [MHz] | Weight [g] | Housing | Packing unit [pcs.] | Order Number |
|--------------------|---------------------|----------------------|-----------------------|------------------------|------------|---------|---------------------|--------------|
|--------------------|---------------------|----------------------|-----------------------|------------------------|------------|---------|---------------------|--------------|

Standard packaging carton box, tape and reel packaging on request

