

Fuseholder Open Design, Holder for MSF 125, Panel Mount



125 VAC/DC · 5 A (UL/CSA)



Description

- Panel mount, front side

Standards

- UL 4248-1 / UL 512
- CSA 4248-1 / no. 39

Approvals

- UL File Number: E39328
- CSA File Number: 38456

References

This type is Phase-out without alternate type
Last order date: 31.12.2012
Fuseholder to [MSF 125](#); [MSU 125](#)


Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

Fuse-Link	Microfuse 125 V	Soldering Methods	Iron
Mounting	Panel Mount	Solderability	350 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 2
Terminal	Solder	Resistance to Soldering Heat	260 °C / 10 sec acc. to IEC 60068-2-20, Test Tb, method 2
Rated Voltage	125 VAC/DC	Contact Resistance	< 5 mΩ at 20 mV
Rated current	5 A (UL/CSA)	Dielectric Strength	> 3 kV (50 Hz; 1 min)
Degree of Protection	IP 40	Impulse Withstand Voltage	> 4 kV between L-N
Admissible Ambient Air Temp.	-40 °C to 85 °C	Insulation Resistance	> 10 MΩ between L-N (500 VDC; 1 min)
Climatic Category	40/085/21 acc. to IEC 60068-1	Overvoltage Category	I - III acc. to IEC 60664-1
Material: Socket	Thermoset, black, UL 94V-0	Pollution Degree	1 - 3 acc. to IEC 60664-1
Material: Terminals	Silver-Plated Brass		
Unit Weight	0.3 g		
Storage Conditions	0 °C to 60 °C, max. 70% r.h.		
Product Marking			

Dimension

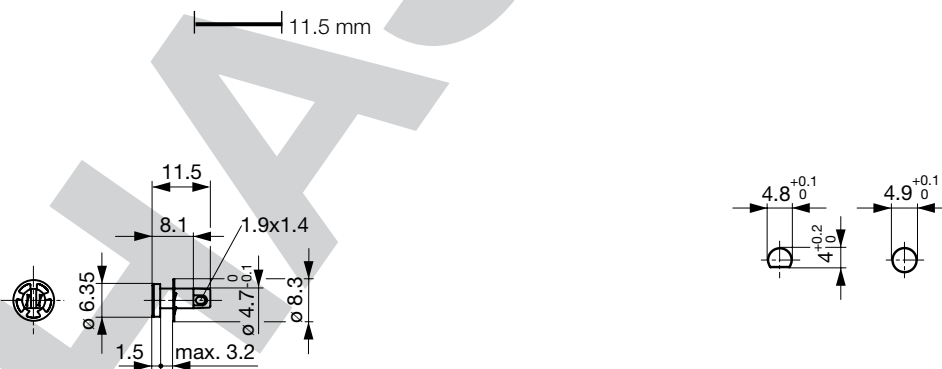

Drilling diagram

All Variants

Holder Order Number

- [0031.7503](#)

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging Unit Plastic Bag (100 pcs.)

PHASE-OUT

30.03.2015