

Description		See below: Approvals and Compliances Weblinks pdf data sheet, html datasheet, General Product Information, Approvals,		
- Diameter 2.0 mm				
Technical Data Diameter	2mm	Resistance to Soldering Heat	260°C / 5 sec. acc. to IEC 60068-2-	
Rated current	10A		200 07 3 see acc. to 120 00000-2- 20 , Test Tb, method 1A	
		Weight	0.5 g	
Allowable Operation Tempe-	-25 °C to 70 °C	Weight	0	
rature		Material: Housing	Thermoplastic (PC), UL 94V-2	
		Surface of contacts	gold plated . Thickness 1.0 µm	

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals


SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Application standards

Application standards where the product can be used

Organization	Design	Standard	Description
IEC	Suitable for applications acc.	IEC/UL 62368-1	Audio/video, information and communication technology equipment - Part 1: Safety requirements
Compliances			
The product comp	olies with following Guide Lines		
Identification	Details	Initiator	Description
ROHS	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

Dimensions [mm]

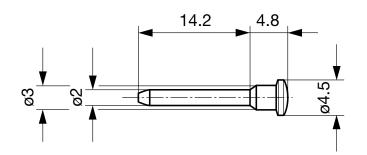

Variants

• •	Order Number
Test Probe red	0040.1062

Availability for all products can be searched real-time: https://www.schurter. com/en/info-center/support-tools/stock-check-distributors

Packaging unit

100 Pcs

Mating Outlets/Connectors

Category / Description



Test Jacks & Probes Overview complete

PB 1011, 1 contact, 10 A, Test Jack	PB 1011
PB 1021, 1 contact, 3 inputs, 6.3 A, Test Jack	PB 1021
PB 1101, 10 A, Test Jack	PB 1101
PB 1111, 1 contact, 10 A, Test Jack	PB 1111
PB 1151, 6.3 A, Test Jack	PB 1151