## AC Filter 2-Stage, Very High Symmetrical Attenuation



		See below: Approvals and Compliances					
Description - Line-filter in standard version - 2 stage - very high attenuation, broadband		<ul> <li>Characteristics</li> <li>Designed for increased requirements</li> <li>2-stage line filter with increased attenuation Protection against interference voltage from the mains Possible interferences generated in the equipment are strongly attenu- ated</li> <li>Especially suitable for use in switching power supplies e.g. in electronic designs with high repetitive switching frequency</li> <li>Suitable for use in equipment according to IEC/UL 62368-1</li> </ul>					
			new applications the type FMBB EP; FMBB NEO				
		Weblinks pdf data sheet, html datasheet, General Product Information, Approvals, Distributor-Stock-Check, Detailed request for product, Microsite					
Technical Data							
Ratings IEC Ratings UL/CSA	1 - 16A @ Ta 40 °C / 250 VAC; 50 Hz 1 - 16A @ Ta 40 °C / 125/250 VAC; 60 Hz	Line Filter	Standard and Industrial Version, IEC 60939, UL 1283, CSA C22.2 no. 8 Technical Details				
Leakage Current	industrial < 1.4 mA (250 V / 60 Hz)	MTBF	> 200'000 h acc. to MIL-HB-217 F				
Dielectric Strength	> 1.7 kVDC between L-N > 2.7 kVDC between L/N-PE Test voltage (2 sec)						
Allowable Operation Tempe- rature	-25 °C to 100 °C						
Climatic Category	25/100/21 acc. to IEC 60068-1						
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140						
Terminal	Quick connect terminals 6.3 x 0.8 mm / screw terminals						
Material	Nickel plated steel						

# **Approvals and Compliances**

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

## Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: FSS2

Approval Logo	Certificates	Certification Body	Description
10	VDE Approvals	VDE	Certificate Number: 40004673
c <b>FL</b> <sup>®</sup> us	UL Approvals	UL	UR File Number: E72928

#### **Product standards**

Product standards that are referenced

Organization	Design	Standard	Description							
IEC	Designed according to	IEC 60939	Passive filters for suppressing electromagnetic interference							
(UL)	Designed according to	UL 1283	Passive filters for suppressing electromagnetic interference							
CSA Group	Designed according to	CSA C22.2 no. 8	Electromagnetic interference (EMI) filters							

### **Application standards**

Application standards where the product can be used

Organization	Design	Standard	Description
IEC	Suitable for applications acc.	IEC/UL 62368-1	Audio/video, information and communication technology equipment - Part 1: Safety requirements

#### Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
CE	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
UK CA	UKCA declaration of conformity	SCHURTER AG	The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.
COMPLANT	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
©	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.


### Dimension [mm]


Case 10


Case 19

1) Line

2) Load









1) Line 2) Load

#### Case 27

Case 48

1) Line 2) Load






1) Line 2) Load


#### Diagrams

Standard version

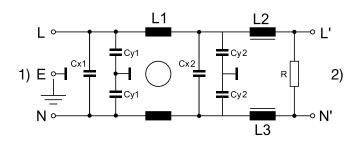

1) Line 2) Load

#### **Attenuation Loss**

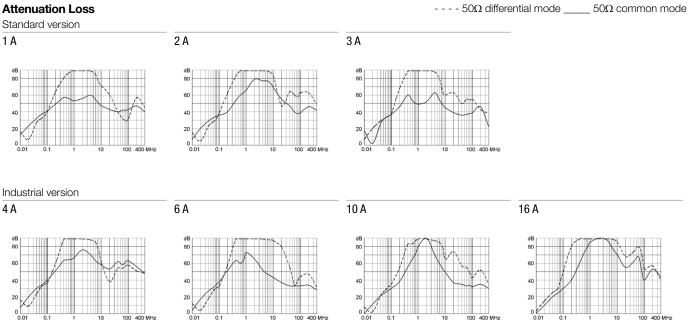

Rated Current [A]	Filter-Type	Leakage Cur- rent [mA]	L1 [mH]	L2 [mH]	L3 [mH]	Cx1 [µF]	Cx2 [µF]	Cy1 [nF]	Cy2 [nF]	<b>R [Μ</b> Ω]	Weight [g]	Housing	Order Number
1	Standard version	0.25	2 x 15	1	-	0.1	0.47	1.5	1	1	121 g	10	5500.2051
2	Standard version	0.25	2 x 10	0.4	0.4	0.1	0.47	1.5	1	1	121 g	10	5500.2052
3	Standard version	0.25	2 x 12	1	-	0.1	0.68	1.5	1	1	275 g	48	5500.2053
4	Industrial version	1.4	2 x 10	0.8	-	0.1	0.68	10	4.7	1	275 g	48	5500.2054
6	Industrial version	1.4	2 x 6	0.5	-	0.1	0.68	10	4.7	1	284 g	48	5500.2055
10	Industrial version	1.4	2 x 5	0.2	0.2	0.1	1	10	4.7	1	529 g	19	5500.2056
16	Industrial version	1.4	2 x 4	0.2	0.2	0.47	2.2	10	4.7	1	2000 g	27	5500.2057

Availability for all products can be searched real-time: https://www.schurter.com/en/info-center/support-tools/stock-check-distributors

Packaging unit

10 Pcs